



COMMERCIAL AIRCRAFT



When selecting a hose and tube assembly partner for large commercial jet applications, quality, service and performance are not an option. They must be a given. Founded in 2004, Aero-Hose, Corp.'s legacy was built on its ability to offer engineering-based solutions in a fraction of the lead time of other manufacturers without sacrificing quality and performance. With its aerospace pedigree, Aero-Hose, Corp.'s products undergo rigorous testing and quality verifications. From traditional fuel, hydraulic and pneumatic lines to complex hose/tube combinations, Aero-Hose, Corp.'s products are found from nose to tail in aircraft throughout the world. With an endless array of hoses to fit any pressure, a variety of end fittings in a multitude of materials and configurations, and sleeving options for extreme heat or high chafe installations, Aero-Hose, Corp. is the ideal partner.

R160 (240 SERIES):

The 240 Series is a lightweight high pressure 3000 PSI (207 Bar) aerospace hose qualified to AS1339. The hose consists of an extruded smoothbore PTFE innercore, reinforced with CRES 304 wire braid in a single layer on sizes -04 through -10, or a double layer on sizes -12 through -24. The PTFE innercore is conductive and provides excellent chemical resistance through a temperature range of -65°F to +400°F (-54°C to +204°C) with unlimited shelf life. The pre-tensioned braid gives 240 Series hose the tightest bend radius of any metal braided high pressure PTFE hose. The standard fitting material is CRES, but titanium is also available for weight savings. Fire protection per AS1055 Class A & B can be either integral or slip-on AS1072 firesleeve. Chafe sleeves are available in a variety of integral or slip-on materials. Hybrid assemblies combining flex hose with multi-bend tube are a Titeflex specialty and provide improved vibration dampening, ease of installation and maintenance over strictly rigid tube from sizes -16 to -24: less than AS1339 rating.

ENGLISH

| HOSE SIZE | OPERATING PRESSURE | HOSE ID (MIN) | HOSE OD (MIN) | HOSE OD (MAX) | BRAIDED HOSE WT/1' | BEND RADIUS (MIN)/2' | PROOF PRESSURE | NEGATIVE PRESSURE | ROOM TEMP BURST (MIN) |
|-----------|--------------------|---------------|---------------|---------------|--------------------|----------------------|----------------|-------------------|-----------------------|
| | psi | in | in | in | lb/in | in | psi | in HG | psi |
| 4 | 3,000 | 0.212 | 0.36 | 0.39 | 0.009 | 1.5 | 6,000 | 16,000 | 12,000 |
| 6 | 3,000 | 0.298 | 0.455 | 0.49 | 0.015 | 2.5 | 6,000 | 14,000 | 10,500 |
| 8 | 3,000 | 0.391 | 0.585 | 0.615 | 0.02 | 2.88 | 6,000 | 14,000 | 10,500 |
| 10 | 3,000 | 0.485 | 0.69 | 0.73 | 0.027 | 3.25 | 6,000 | 12,000 | 9,000 |
| 12 | 3,000 | 0.602 | 0.95 | 0.99 | 0.058 | 4 | 6,000 | 12,000 | 9,000 |
| 16 | 3,000 | 0.852 | 1.23 | 1.27 | 0.085 | 5 | 6,000 | 12,000 | 9,000 |
| 20 | 3,000 | 1.101 | 1.56 | 1.64 | 0.154 | 12 | 6,000 | 12,000 | 9,000 |
| 24 | 3,000 | 1.36 | 1.84 | 1.9 | 0.159 | 14 | 6,000 | 12,000 | 9,000 |

NOTES /1/ Over minimum 12 inch length /2/ Inside of bend

METRIC

| HOSE SIZE | OPERATING PRESSURE | HOSE ID (MIN) | HOSE OD (MIN) | HOSE OD (MAX) | BRAIDED HOSE WT/1' | BEND RADIUS (MIN)/2' | PROOF PRESSURE | NEGATIVE PRESSURE | ROOM TEMP BURST (MIN) |
|-----------|--------------------|---------------|---------------|---------------|--------------------|----------------------|----------------|-------------------|-----------------------|
| | bar | mm | mm | mm | g/m | mm | bar | mm Hg | bar |
| 4 | 207 | 5.4 | 9.1 | 9.9 | 161 | 38.1 | 414 | 1 103 | 827 |
| 6 | 207 | 7.6 | 11.7 | 12.45 | 268 | 63.5 | 414 | 965 | 724 |
| 8 | 207 | 9.9 | 14.9 | 15.62 | 357 | 73 | 414 | 965 | 724 |
| 10 | 207 | 12.6 | 17.8 | 18.5 | 482 | 82.5 | 414 | 827 | 621 |
| 12 | 207 | 15.6 | 24.1 | 25.15 | 1 036 | 98.5 | 414 | 827 | 621 |
| 16 | 207 | 21.6 | 31.2 | 32.3 | 1 518 | 127 | 414 | 827 | 621 |
| 20 | 207 | 28 | 41.7 | 41.7 | 2 753 | 304.8 | 414 | 827 | 621 |
| 24 | 207 | 34.5 | 46.7 | 48.3 | 2 842 | 355.6 | 414 | 827 | 621 |

NOTES /1/ Over minimum 305mm length /2/ Inside of bend

SERIES: 240

SPECIFICATION: SAE AS1339

BRAID: CRES

INNERCORE: PTFE Smoothbore


QUALIFICATIONS:

SAE AS1339

TSO C75 Type III-B-S/P-F

AS1055 Type IIa & IIb, Class A & B,

Integral and Slip-on Firesleeve

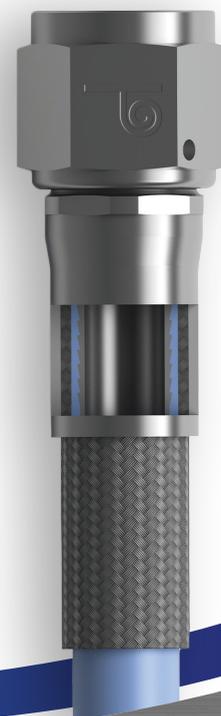

1845 Town Center Blvd. #140, Orange Park, FL 32003
(904) 215-9638 www.aero-hose.com

